Inhaltsverzeichnis

Timer Editor 3

Timer Editor

These settings are structured identically in the Guide View, Overview view, Grid view and Next event view.



Explanation of the keys

	Save created timer
	On/Off. The start and end time of a recording is adjusted to the EPG data. In the Vti Timer Menu setting , "Automatically adapt recording time to EPG data" must be activated
	On/Off. For the VPS on option, the VPS plugin must be activated
OK	Edit highlighted timer
EXIT	Exit
	Depending on the input field, the following keys appear in the editor
	Switch back one station with the left control pad button
	Use the right control pad button to switch to a station
	Depending on the input option, switch back 10 channels or 15 minutes
	Depending on the input option, switch 10 stations forward or 15 minutes back
<	Depending on the input option, switch back 10 channels or 1 minute
>	Depending on the input option, switch back 10 stations or forward 1 minute
OK	Edit entry or change mode in the next field, i.e. Power off, Automatic, Standby or none
ER	Take over the name of the program from the first input field in the recording path, then the recording will be saved in this path

Editor Explanation

The following screenshots show the various keys of the respective fields, depending on where you are.

The blue framed text shows which setting is explained below the screenshot.


The VPS and EPG function is explained HERE in detail.


Show Name



The framed field shows the title of the program to be recorded. This can be edited with OK.

Channel Selection

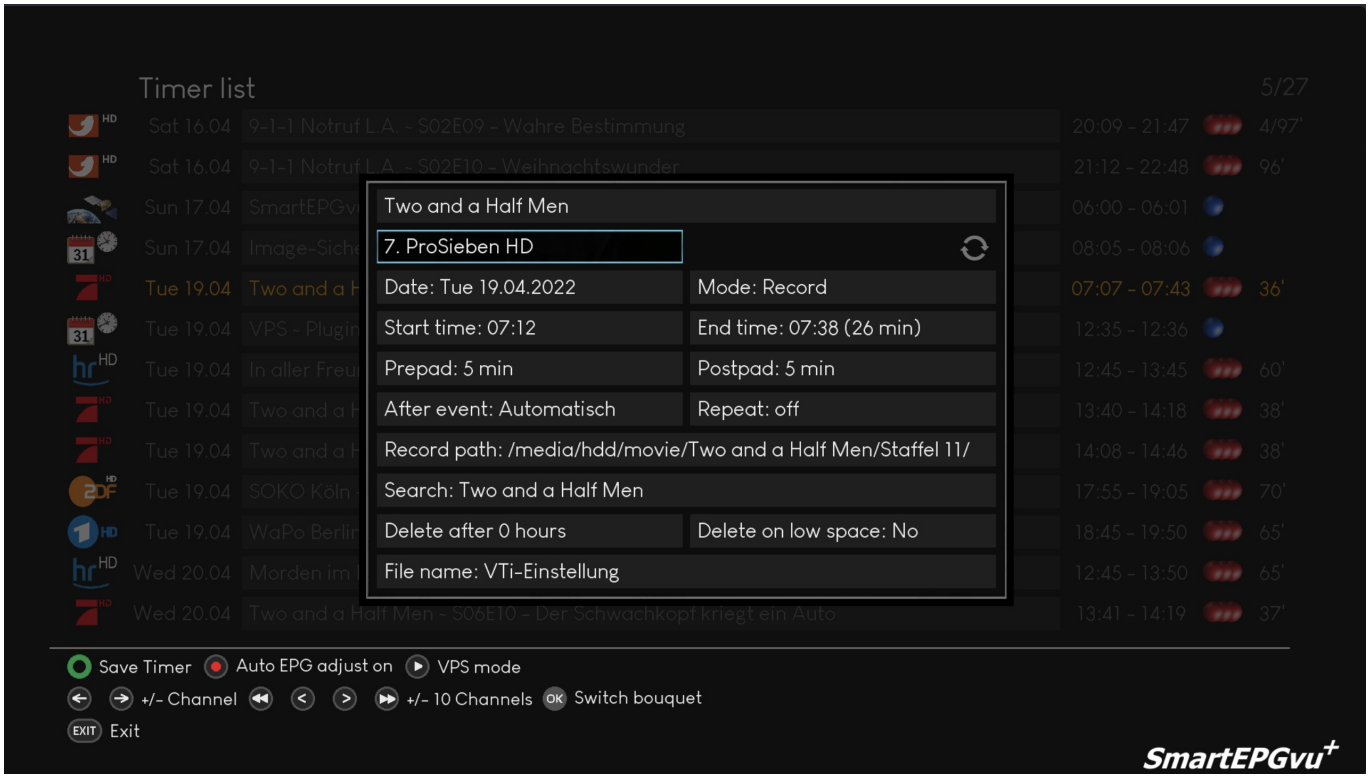

The framed field indicates the station for the recording. The channel selection be changed with the keys .

Date setting



The framed box indicates the scheduled date of recording. The date can be edited with the OK.

Recording mode



With  or  the mode of recording can be changed. The following options are available:

Record

The program is recorded

Blocked

The program will not be recorded

Zap & record

Switches to the recording station and the program is recorded

Zap

Switches to the recording station without recording


Remind

A so-called M-Timer is created, and a reminder is displayed at the program's set start time

Setting the start & End time




The framed box indicates the scheduled start time of the recording.


The time can be edited with the 

keys. This also applies to the **end times**.

Adjustment of Prepad & Postpad

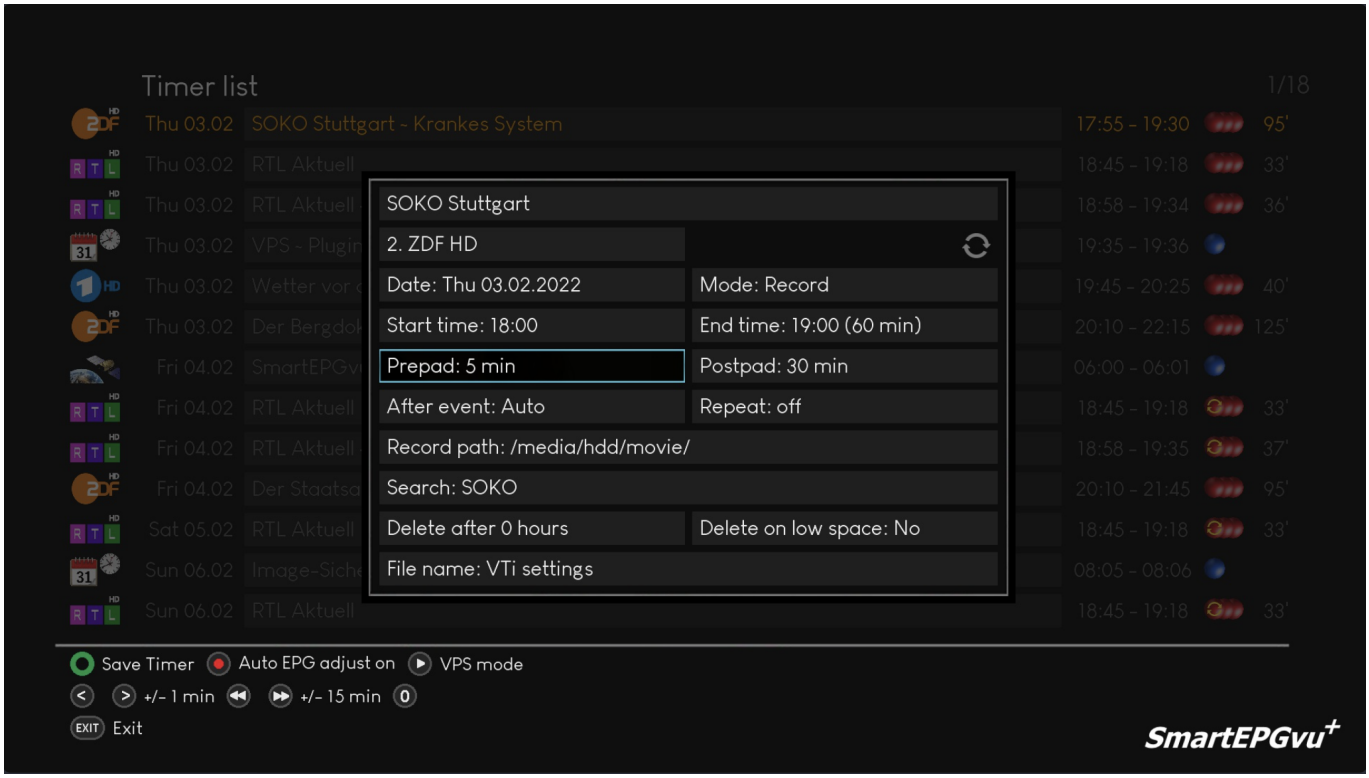

The framed field shows the Prepad for the recording.


With the keys 

you can change the setting. This also applies to the **Postpad**.

With the key 


neither a Prepad nor a Postpad is set.

After event setting

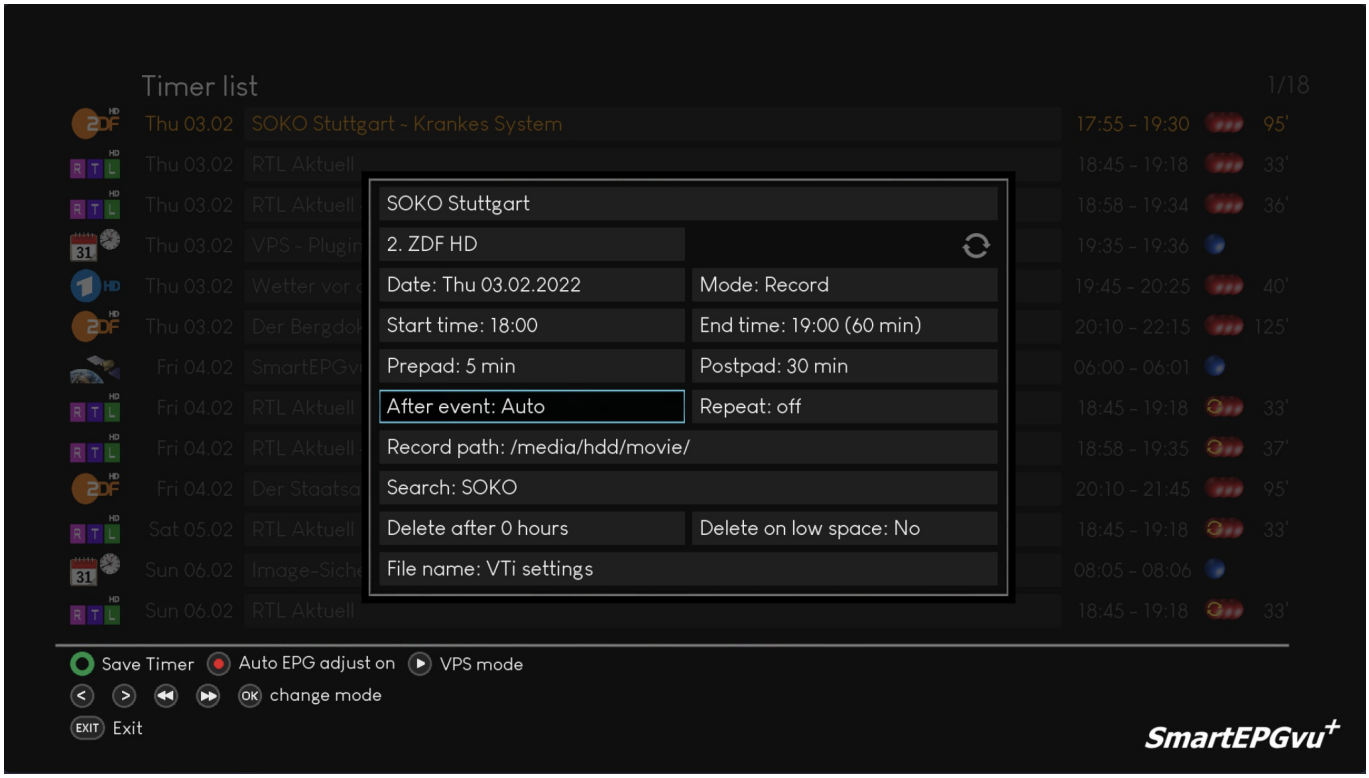

With OK you can set what the Beyonwiz should do after the recording. The following options are available:
** Auto > None > Standby > Deep Standby**


Repeat settings

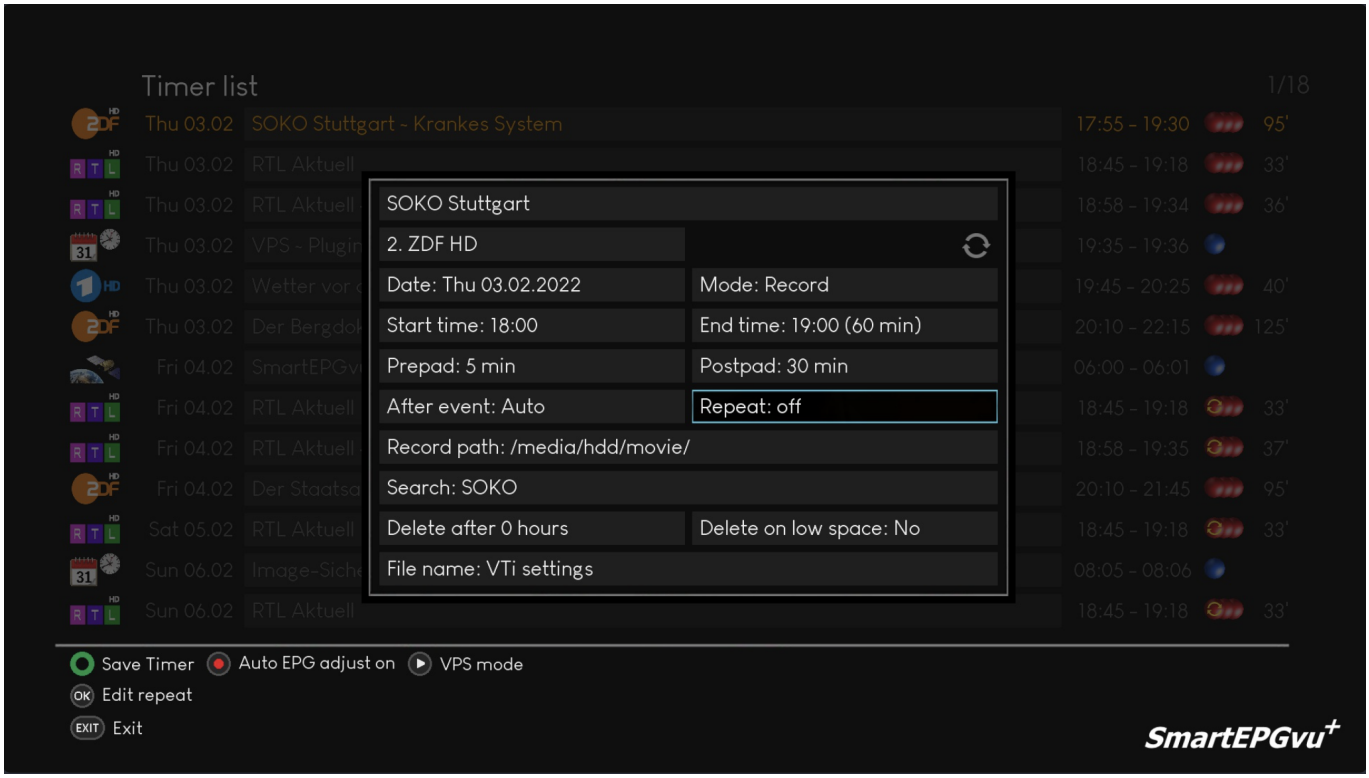


Repetitions can be defined with the following keys after pressing the OK key:

OK Save repeat 0 Off 1 Mon 2 Tue 3 Wed 4 Thu 5 Fri 6 Sat 7 Sun 8 Work days 9 weekend

Record path setting

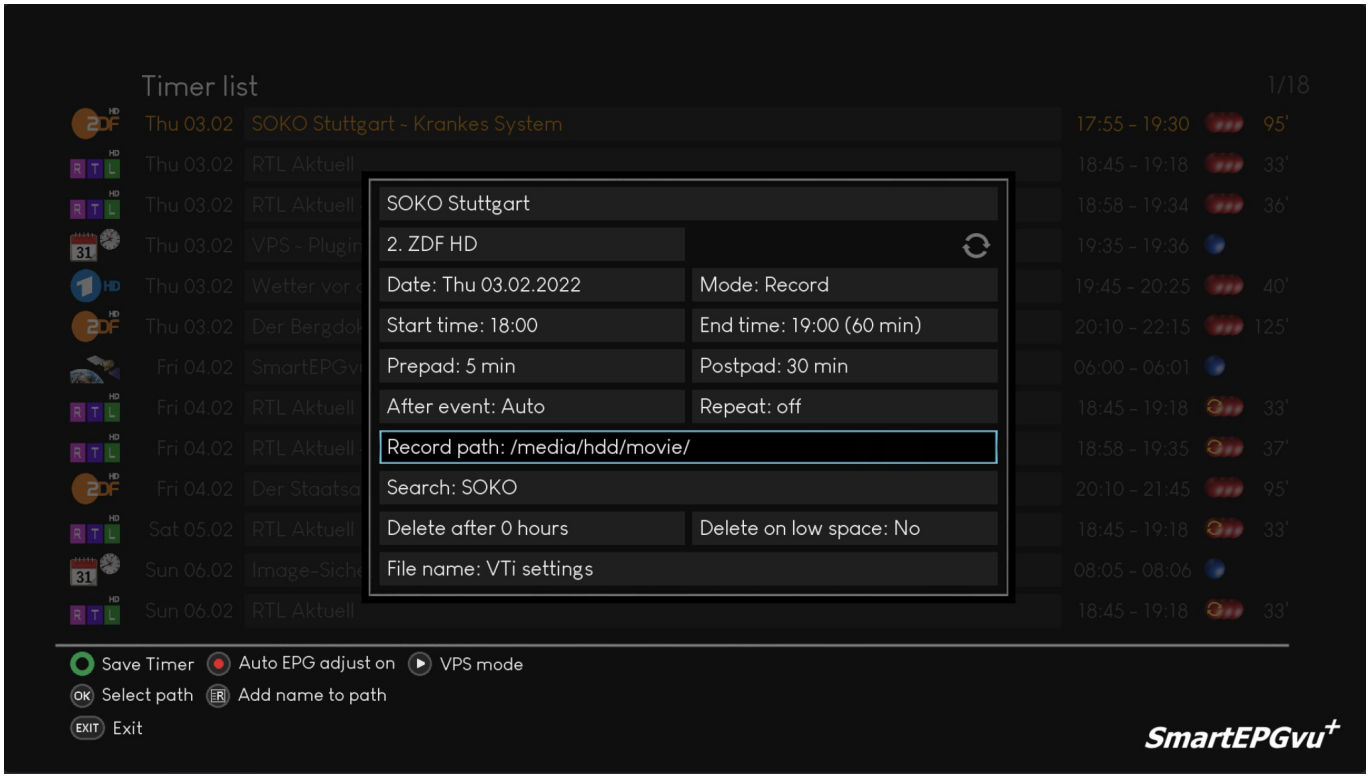

With the (PVR key) the name of the program from the first field can be used to specify the location in which the recording will be saved.

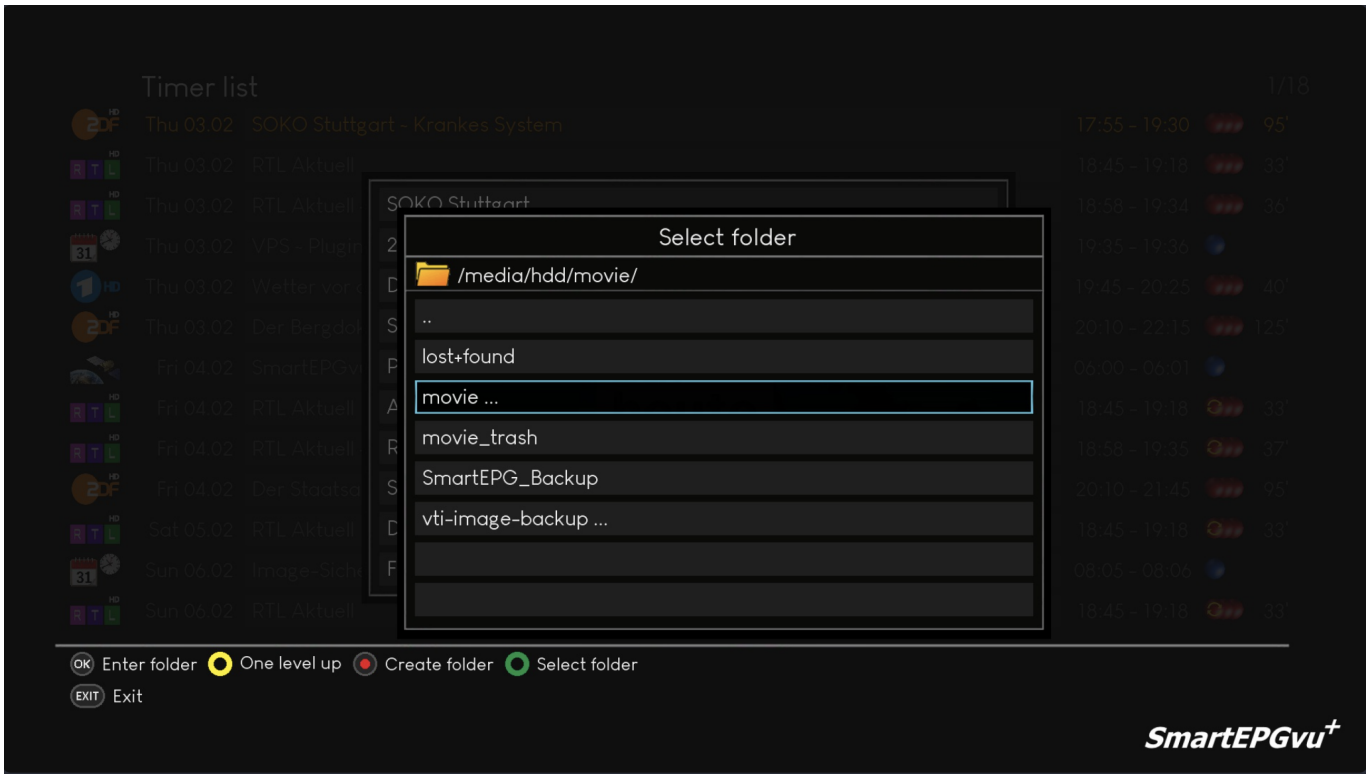


Alternatively, the path for saving the recording can be selected with OK.

Explanation of the keys

OK	Switch to the marked directory
	Switch to the parent directory
	On/Off. The start and end time of a recording is adjusted to the EPG data. In the Vti Timer Menu setting , "Automatically adapt recording time to EPG data" must be activated
	Select the marked directory as storage location
EXIT	Exit

Setting the search


With the OK key you can switch to Search view. Unless a search request has been created for the timer, this field cannot be edited.

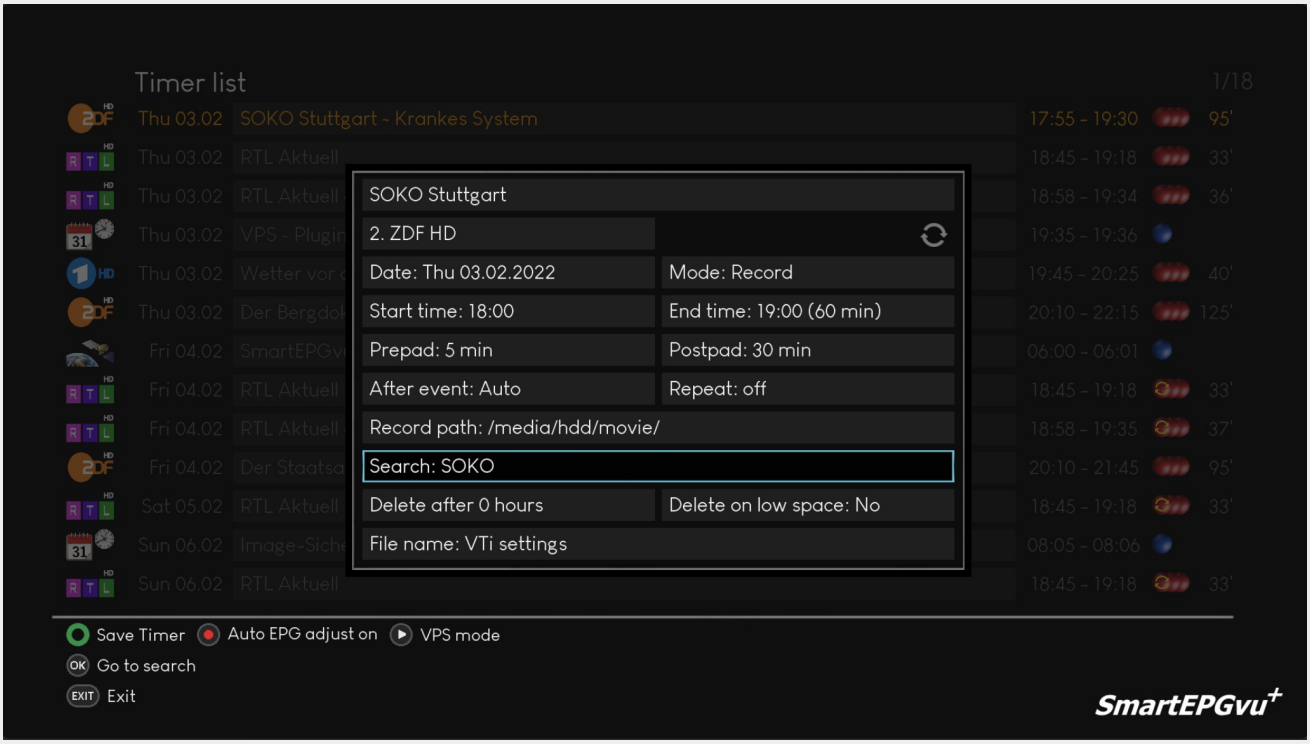

Delete settings

Delete after hours: Recordings will be automatically deleted after a specified time.
This routine is called up once an hour and deletes the recordings after the set expiry time.


Delete when there is insufficient space: The recording is automatically deleted when there is no more space on the hard drive (currently hard coded to 15GB)

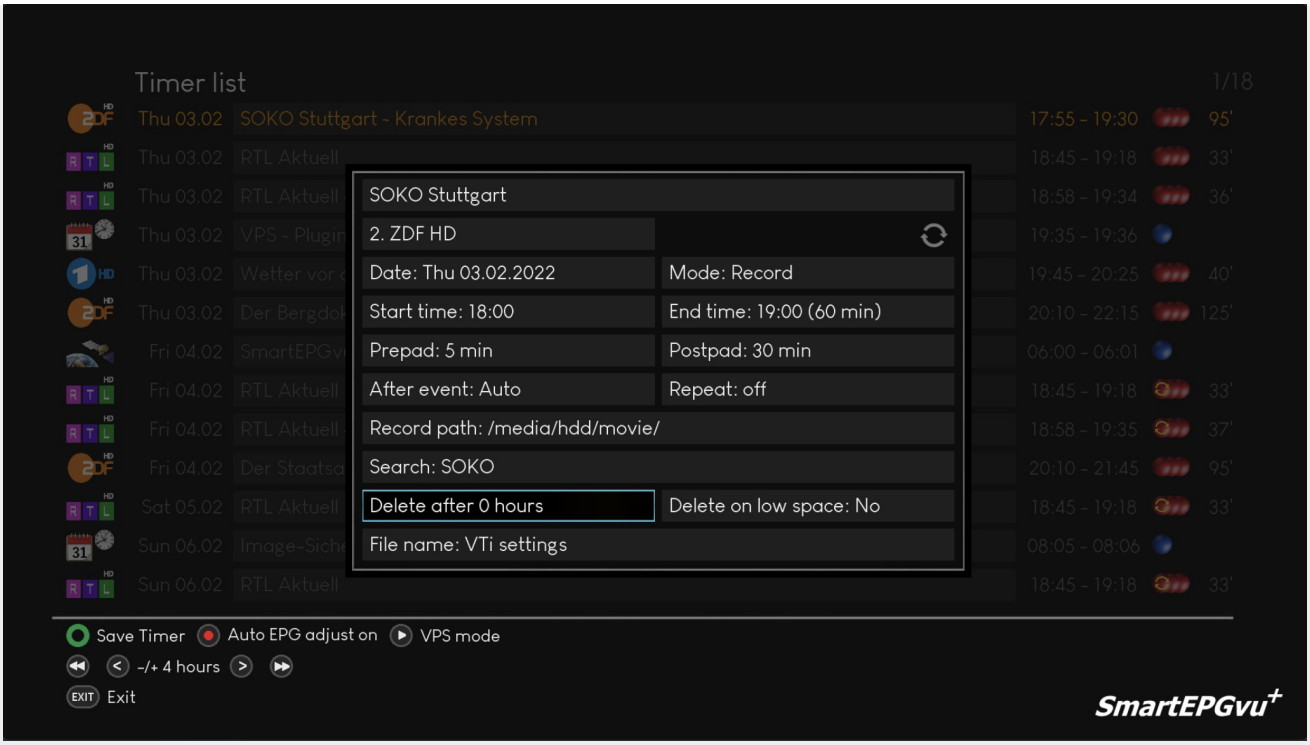

File Name

Use the left and right keys to select which suffix should be added to the recording name.
The options are:

- vu+ standard (Beyonwiz standard)
- Name
- Name + Description
- Name + Timestamp
- Name + Description or Time
- Name + Description + Time
- Name + Time + Description

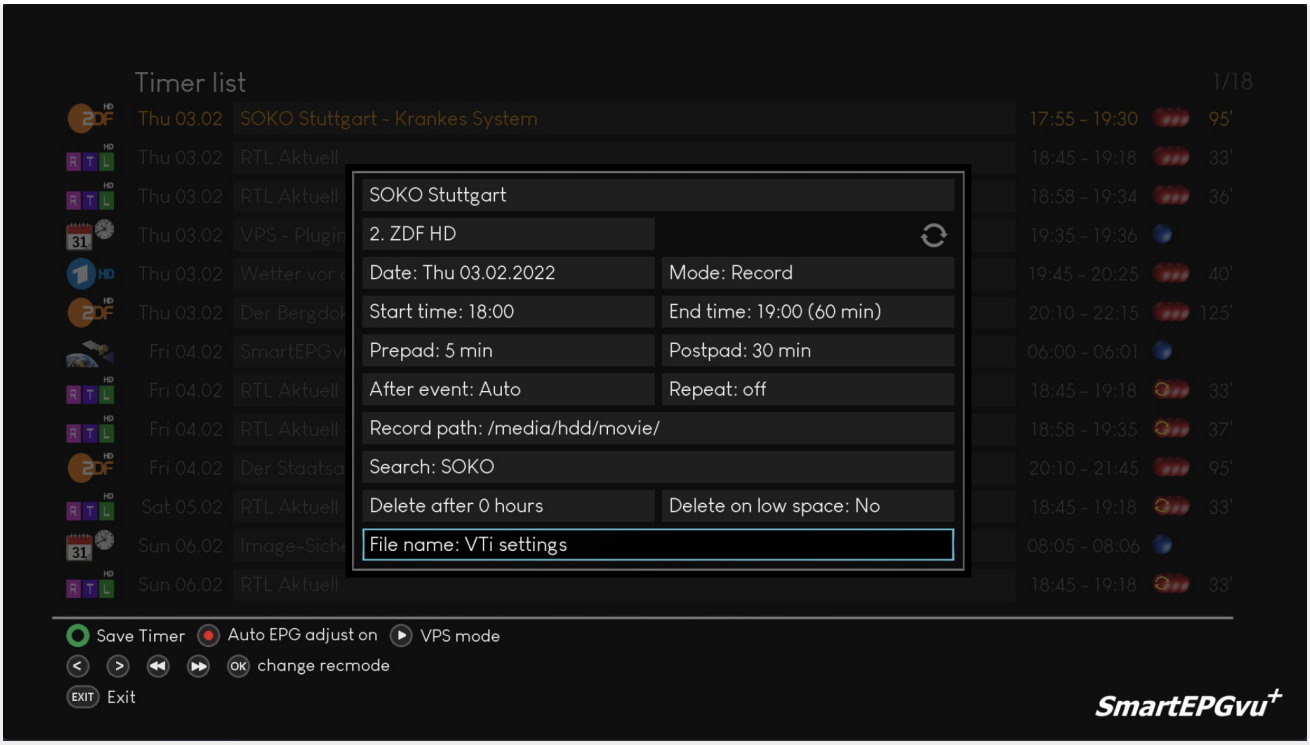

If you have not selected „vu+ default values“ (the Beyonwiz default values) in a search or in the global settings, the recording will be renamed after the end of the recording. If a recording with the same name already exists, the newer one is given the suffix „-2“, „-3“, etc.

From:
https://nayal.de/ -

Permanent link:
https://nayal.de/doku.php/oz:timereditor

Last update: **2024/01/14 19:39**