


Inhaltsverzeichnis

Timer Editor	3
<i>Explanation of the keys</i>	3
<i>Editor Explanation</i>	4
<i>Show Name</i>	4
<i>Channel Selection</i>	4
<i>Date setting</i>	5
<i>Recording mode</i>	6
Record	7
Blocked	7
Zap & record	7
Zap	7
Remind	7
<i>Setting the start & End time</i>	7
<i>Adjustment of Prepad & Postpad</i>	8
<i>After event setting</i>	8
<i>Repeat settings</i>	9
<i>Record path setting</i>	10
<i>Explanation of the keys</i>	11
<i>Setting the search</i>	11
<i>Delete settings</i>	12
<i>File Name</i>	13

Timer Editor

These settings are structured identically in the [Guide View](#), [Overview view](#), [Grid view](#) and [Next event view](#).

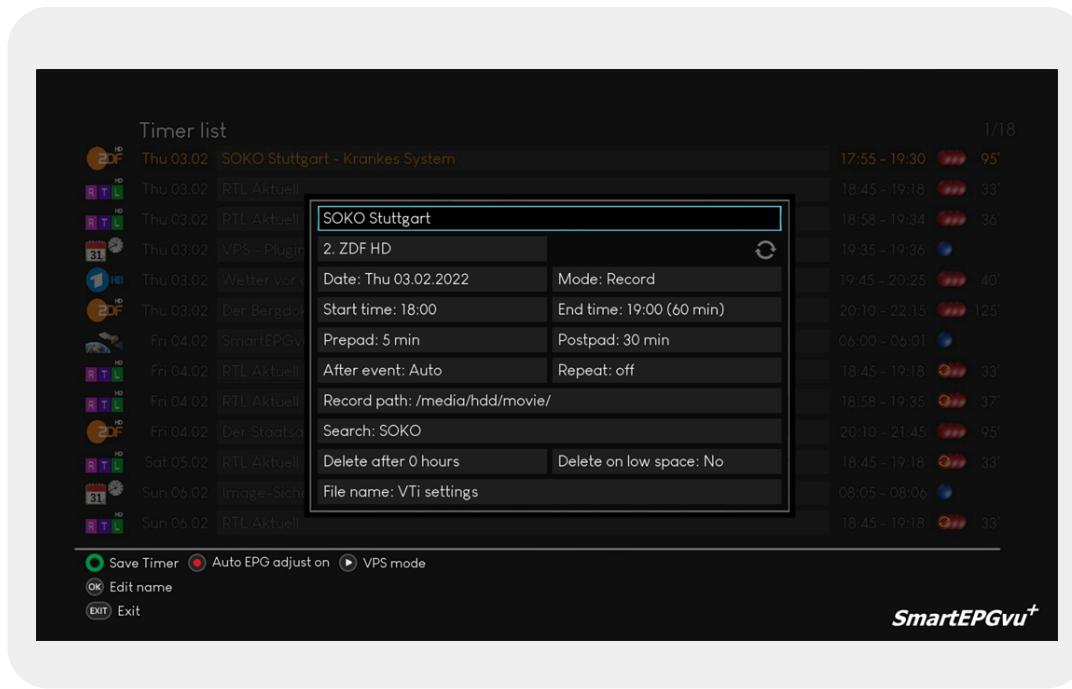

Explanation of the keys



- Save created timer
- On/Off. The start and end time of a recording is adjusted to the EPG data. In the Vti Timer Menu setting, "Automatically adapt recording time to EPG data" must be activated
- On/Off. For the VPS on option, the VPS plugin must be activated
- Edit highlighted timer
- Exit

Depending on the input field, the following keys appear in the editor



- Switch back one station with the left control pad button
- Use the right control pad button to switch to a station
- Depending on the input option, switch back 10 channels or 15 minutes
- Depending on the input option, switch 10 stations forward or 15 minutes back
- Depending on the input option, switch back 10 channels or 1 minute
- Depending on the input option, switch back 10 stations or forward 1 minute
- Edit entry or change mode in the next field, i.e. Power off, Automatic, Standby or none
- Take over the name of the program from the first input field in the recording path, then the recording will be saved in this path

Editor Explanation

The following screenshots show the various keys of the respective fields, depending on where you are.



The blue framed text shows which setting is explained below the screenshot.



The VPS and EPG function is explained [HERE](#) in detail.

Show Name



The framed field shows the title of the program to be recorded. This can be edited with .

Channel Selection

Timer list

 Sat 16.04	9-1-1 Notruf L.A. - S02E09 – Wohre Bestimmung	5/27
 Sat 16.04	9-1-1 Notruf L.A. - S02E10 – Weihnachtswunder	20:09 – 21:47 4/97'
 Sun 17.04	SmartEPGvu	21:12 – 22:48 96'
 Sun 17.04	Image-Sicherung	06:00 – 06:01
 Tue 19.04	Two and a Half Men	08:05 – 08:06
 Tue 19.04	Two and a Half Men	07:07 – 07:43 36'
 Tue 19.04	VPS - Plugin	12:35 – 12:36
 Tue 19.04	In aller Freizeit	12:45 – 13:45 60'
 Tue 19.04	Two and a Half Men	13:40 – 14:18 38'
 Tue 19.04	Two and a Half Men	14:08 – 14:46 38'
 Tue 19.04	SOKO Köln - Staffel 11	17:55 – 19:05 70'
 Tue 19.04	WaPo Berlin	18:45 – 19:50 65'
 Wed 20.04	Morden im	12:45 – 13:50 65'
 Wed 20.04	Two and a Half Men - S06E10 – Der Schwachkopf kriegt ein Auto	13:41 – 14:19 37'

Two and a Half Men

7. ProSieben HD

Date: Tue 19.04.2022 Mode: Record

Start time: 07:12 End time: 07:38 (26 min)

Prepad: 5 min Postpad: 5 min

After event: Automatisch Repeat: off

Record path: /media/hdd/movie/Two and a Half Men/Staffel 11/

Search: Two and a Half Men

Delete after 0 hours Delete on low space: No

File name: VTi-Einstellung

Save Timer Auto EPG adjust on VPS mode

+/- Channel +/- 10 Channels Switch bouquet

Exit

SmartEPGvu⁺

The framed field indicates the station for the recording. The channel selection be changed with

the keys    .

Date setting

Timer list

 Thu 03.02	SOKO Stuttgart - Krankes System	1/18
 Thu 03.02	RTL Aktuell	17:55 - 19:30 95'
 Thu 03.02	RTL Aktuell	18:45 - 19:18 33'
 Thu 03.02	VPS - Plugin	18:58 - 19:34 36'
 Thu 03.02	Wetter vorab	19:35 - 19:36
 Thu 03.02	Der Bergdoktor	19:45 - 20:25 40'
 Fri 04.02	SmartEPGv1	20:10 - 22:15 125'
 Fri 04.02	RTL Aktuell	06:00 - 06:01
 Fri 04.02	RTL Aktuell	18:45 - 19:18 33'
 Fri 04.02	Der Staatsanwalt	18:58 - 19:35 37'
 Sat 05.02	RTL Aktuell	20:10 - 21:45 95'
 Sun 06.02	Image-Sicherung	18:45 - 19:18 33'
 Sun 06.02	RTL Aktuell	08:05 - 08:06
		18:45 - 19:18 33'

SOKO Stuttgart

2. ZDF HD

Date: Thu 03.02.2022 Mode: Record

Start time: 18:00 End time: 19:00 (60 min)

Prepad: 5 min Postpad: 30 min

After event: Auto Repeat: off

Record path: /media/hdd/movie/

Search: SOKO

Delete after 0 hours Delete on low space: No

File name: VTi settings

Save Timer Auto EPG adjust on VPS mode

Edit date Exit

SmartEPGv1⁺

The framed box indicates the scheduled date of recording. The date can be edited with the .

Recording mode

Timer list

 Thu 03.02	SOKO Stuttgart - Krankes System	1/18
 Thu 03.02	RTL Aktuell	17:55 - 19:30 95'
 Thu 03.02	RTL Aktuell	18:45 - 19:18 33'
 Thu 03.02	VPS - Plugin	18:58 - 19:34 36'
 Thu 03.02	Wetter vorab	19:35 - 19:36
 Thu 03.02	Der Bergdoktor	19:45 - 20:25 40'
 Fri 04.02	SmartEPGv1	20:10 - 22:15 125'
 Fri 04.02	RTL Aktuell	06:00 - 06:01
 Fri 04.02	RTL Aktuell	18:45 - 19:18 33'
 Fri 04.02	Der Staatsanwalt	18:58 - 19:35 37'
 Sat 05.02	RTL Aktuell	20:10 - 21:45 95'
 Sun 06.02	Image-Sicherung	18:45 - 19:18 33'
 Sun 06.02	RTL Aktuell	08:05 - 08:06
		18:45 - 19:18 33'

SOKO Stuttgart

2. ZDF HD

Date: Thu 03.02.2022 Mode: Record

Start time: 18:00 End time: 19:00 (60 min)

Prepad: 5 min Postpad: 30 min

After event: Auto Repeat: off

Record path: /media/hdd/movie/

Search: SOKO

Delete after 0 hours Delete on low space: No

File name: VTi settings

Save Timer Auto EPG adjust on VPS mode

Edit date Exit

SmartEPGv1⁺

With  or     the mode of recording can be changed. The following options are available:

Record

The program is recorded

Blocked

The program will not be recorded

Zap & record

Switches to the recording station and the program is recorded


Zap

Switches to the recording station without recording

Remind

A so-called M-Timer is created, and a reminder is displayed at the program's set start time

Setting the start & End time

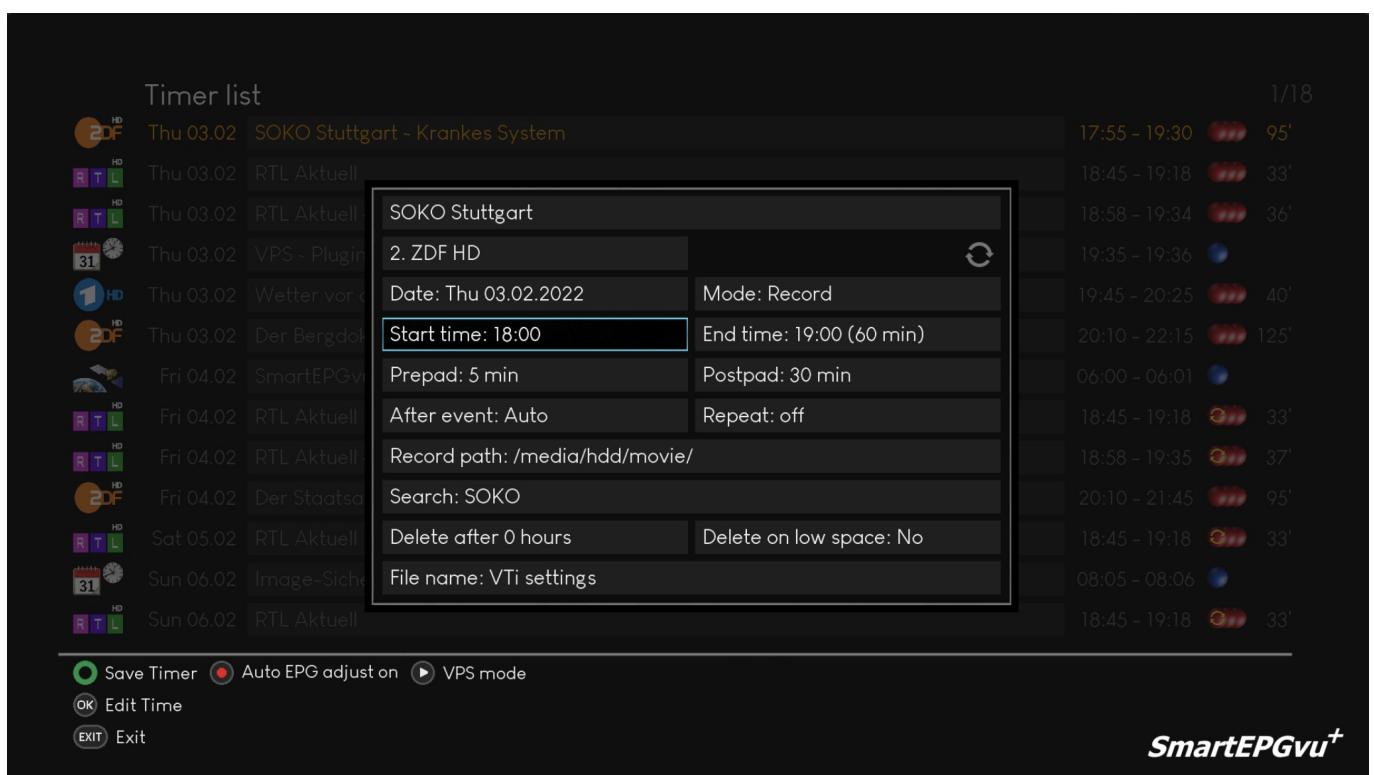

The screenshot shows the SmartEPGvu+ software interface for managing timer recordings. The main window displays a list of scheduled recordings, and a detailed configuration dialog is open for the first entry.

Timer list:

- Thu 03.02: SOKO Stuttgart - Krankes System (2. ZDF HD)
- Thu 03.02: RTL Aktuell
- Thu 03.02: RTL Aktuell
- Thu 03.02: VPS ~ Plugin
- Thu 03.02: Wetter vorab
- Thu 03.02: Der Bergdoktor
- Fri 04.02: SmartEPGvu+
- Fri 04.02: RTL Aktuell
- Fri 04.02: RTL Aktuell
- Fri 04.02: Der Staatsanwalt
- Sat 05.02: RTL Aktuell
- Sun 06.02: Image-Sicherung
- Sun 06.02: RTL Aktuell

Selected Timer Details:

Date: Thu 03.02.2022	Mode: Record
Start time: 18:00	End time: 19:00 (60 min)
Prepad: 5 min	Postpad: 30 min
After event: Auto	Repeat: off
Record path: /media/hdd/movie/	
Search: SOKO	
Delete after 0 hours	Delete on low space: No
File name: VTi settings	

Bottom Buttons:


- Save Timer (green circle)
- Auto EPG adjust on (radio button)
- VPS mode (radio button)
- Edit Time (OK button)
- Exit (EXIT button)

SmartEPGvu+ Logo:

The framed box indicates the scheduled start time of the recording.

The time can be edited with the  keys. This also applies to the **end times**.

Adjustment of Prepad & Postpad

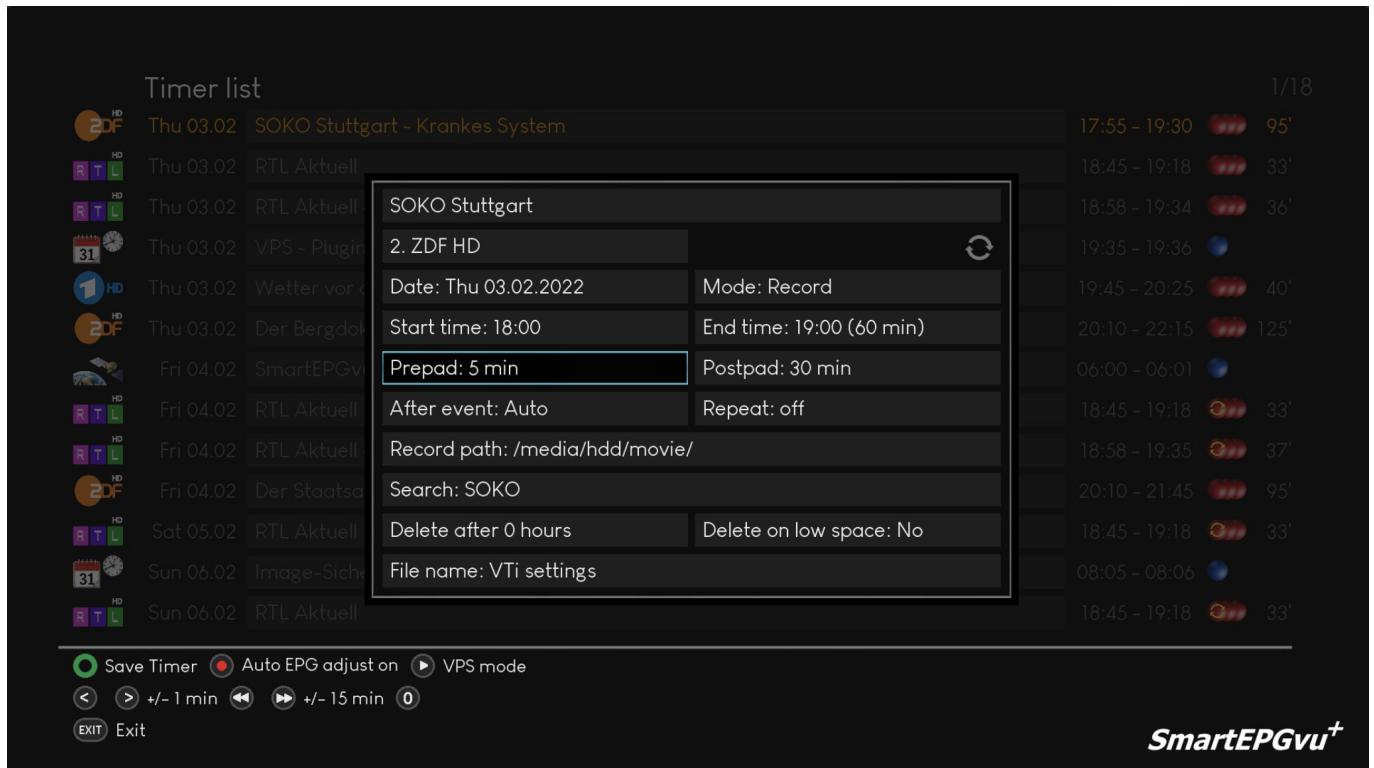

The framed field shows the Prepad for the recording.



With the keys  you can change the setting. This also applies to the **Postpad**.



With the key  neither a Prepad nor a Postpad is set.

After event setting

The image shows the SmartEPGv+ software interface for managing TV timers. At the top, a 'Timer list' is displayed with several entries for different channels and programs. A specific timer for 'SOKO Stuttgart' on '2. ZDF HD' is selected and shown in a detailed configuration dialog box. The dialog box contains the following settings:

- Date: Thu 03.02.2022
- Mode: Record
- Start time: 18:00
- End time: 19:00 (60 min)
- Prepad: 5 min
- Postpad: 30 min
- After event: Auto
- Repeat: off
- Record path: /media/hdd/movie/
- Search: SOKO
- Delete after 0 hours
- Delete on low space: No
- File name: VTi settings

Below the dialog box, there are several control buttons and a logo:

- Save Timer (green circle)
- Auto EPG adjust on (red circle)
- VPS mode (blue circle)
- Change mode (button with arrows)
- Exit (button)

SmartEPGv+⁺

With you can set what the Beyonwiz should do after the recording. The following options are available:

Auto > None > Standby > Deep Standby

Repeat settings

Timer list

 Thu 03.02	SOKO Stuttgart - Krankes System	17:55 - 19:30	95'
 Thu 03.02	RTL Aktuell	18:45 - 19:18	33'
 Thu 03.02	RTL Aktuell	18:58 - 19:34	36'
 Thu 03.02	VPS - Plugin	19:35 - 19:36	1'
 Thu 03.02	Wetter vor	19:45 - 20:25	40'
 Thu 03.02	Der Bergdok	20:10 - 22:15	125'
 Fri 04.02	SmartEPGvi	06:00 - 06:01	1'
 Fri 04.02	RTL Aktuell	18:45 - 19:18	33'
 Fri 04.02	RTL Aktuell	18:58 - 19:35	37'
 Fri 04.02	Der Staatsa	20:10 - 21:45	95'
 Sat 05.02	RTL Aktuell	18:45 - 19:18	33'
 Sun 06.02	Image-Siche	08:05 - 08:06	1'
 Sun 06.02	RTL Aktuell	18:45 - 19:18	33'

Save Timer Auto EPG adjust on VPS mode

Edit repeat Exit

SmartEPGvu⁺

Repetitions can be defined with the following keys after pressing the  key:

 Save repeat  Off  Mon  Tue  Wed  Thu  Fri  Sat  Sun  Work days  weekend

Record path setting

Timer list

 Thu 03.02	SOKO Stuttgart - Krankes System	17:55 - 19:30	95'
 Thu 03.02	RTL Aktuell	18:45 - 19:18	33'
 Thu 03.02	RTL Aktuell	18:58 - 19:34	36'
 Thu 03.02	VPS - Plugin	19:35 - 19:36	1'
 Thu 03.02	Wetter vor	19:45 - 20:25	40'
 Thu 03.02	Der Bergdok	20:10 - 22:15	125'
 Fri 04.02	SmartEPGvi	06:00 - 06:01	1'
 Fri 04.02	RTL Aktuell	18:45 - 19:18	33'
 Fri 04.02	RTL Aktuell	18:58 - 19:35	37'
 Fri 04.02	Der Staatsa	20:10 - 21:45	95'
 Sat 05.02	RTL Aktuell	18:45 - 19:18	33'
 Sun 06.02	Image-Siche	08:05 - 08:06	1'
 Sun 06.02	RTL Aktuell	18:45 - 19:18	33'


Save Timer Auto EPG adjust on VPS mode

Select path Add name to path

Exit

SmartEPGvu⁺

With the  (PVR key) the name of the program from the first field can be used to specify the location in which the recording will be saved.

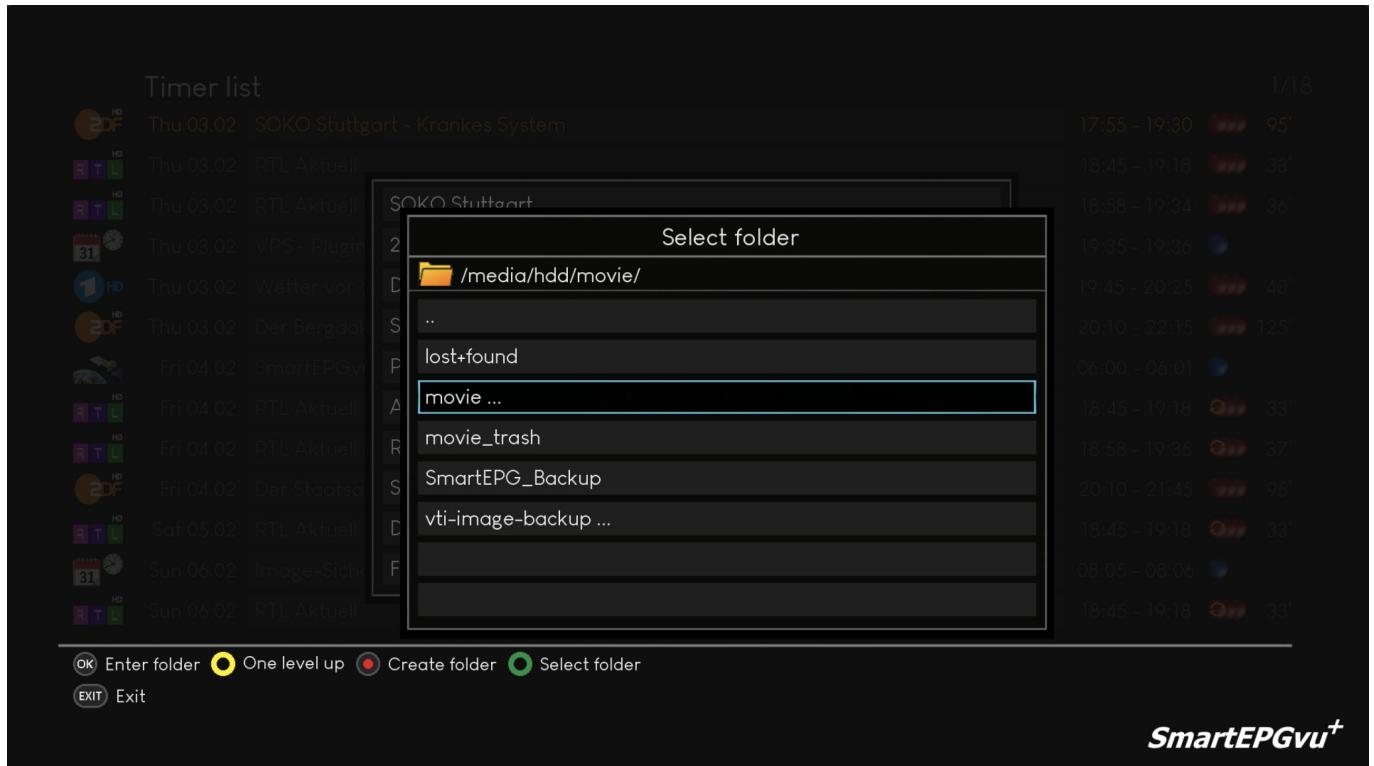

Alternatively, the path for saving the recording can be selected with .

Explanation of the keys



- Switch to the marked directory
- Switch to the parent directory
- On/Off. The start and end time of a recording is adjusted to the EPG data. In the Vti Timer Menu setting, "Automatically adapt recording time to EPG data" must be activated
- Select the marked directory as storage location
- Exit

Setting the search



With the **OK** key you can switch to [Search view](#). Unless a search request has been created for the timer, this field cannot be edited.

The screenshot shows the 'Timer list' interface of the SmartEPGvu+ application. A specific timer for 'SOKO Stuttgart' is selected and displayed in a detailed configuration window. The timer details are as follows:


- Date: Thu 03.02.2022
- Mode: Record
- Start time: 18:00
- End time: 19:00 (60 min)
- Prepad: 5 min
- Postpad: 30 min
- After event: Auto
- Repeat: off
- Record path: /media/hdd/movie/
- Search: SOKO
- Delete after 0 hours
- Delete on low space: No
- File name: VTi settings

At the bottom of the interface, there are several buttons: **Save Timer**, **Auto EPG adjust on**, **VPS mode**, **OK Go to search**, and **EXIT Exit**. The application is identified as **SmartEPGvu⁺**.

Delete settings

Delete after hours: Recordings will be automatically deleted after a specified time. This routine is called up once an hour and deletes the recordings after the set expiry time.

Delete when there is insufficient space: The recording is automatically deleted when there is no more space on the hard drive (currently hard coded to 15GB)

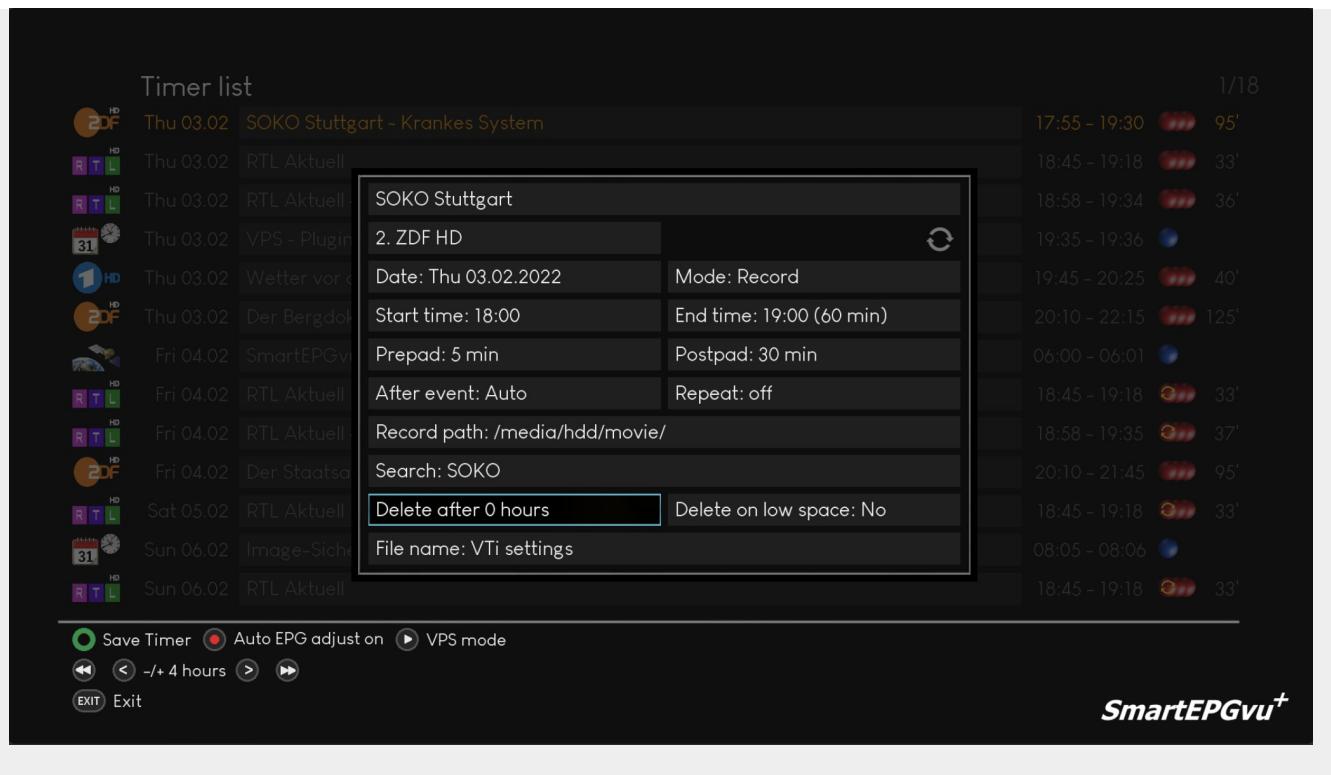

File Name

Use the left and right keys to select which suffix should be added to the recording name.
The options are:

- vu+ standard (Beyonwiz standard)
- Name
- Name + Description
- Name + Timestamp
- Name + Description or Time
- Name + Description + Time
- Name + Time + Description

Timer list 1/18

Thu 03.02	SOKO Stuttgart - Krankes System	17:55 - 19:30	95'
Thu 03.02	RTL Aktuell	18:45 - 19:18	33'
Thu 03.02	RTL Aktuell	18:58 - 19:34	36'
Thu 03.02	VPS - Plugin	19:35 - 19:36	1'
Thu 03.02	Wetter vor c	19:45 - 20:25	40'
Thu 03.02	Der Bergdok	20:10 - 22:15	125'
Fri 04.02	SmartEPGvi	06:00 - 06:01	1'
Fri 04.02	RTL Aktuell	18:45 - 19:18	33'
Fri 04.02	RTL Aktuell	18:58 - 19:35	37'
Fri 04.02	Der Staatsa	20:10 - 21:45	95'
Sat 05.02	RTL Aktuell	18:45 - 19:18	33'
Sun 06.02	Image-Siche	08:05 - 08:06	1'
Sun 06.02	RTL Aktuell	18:45 - 19:18	33'

SOKO Stuttgart

2. ZDF HD 

Date: Thu 03.02.2022 Mode: Record

Start time: 18:00 End time: 19:00 (60 min)

Prepad: 5 min Postpad: 30 min

After event: Auto Repeat: off

Record path: /media/hdd/movie/

Search: SOKO

Delete after 0 hours Delete on low space: No

File name: VTi settings

 Save Timer  Auto EPG adjust on  VPS mode

     change recmode

 Exit 



If you have not selected „vu+ default values“ (the Beyonwiz default values) in a search or in the global settings, the recording will be renamed after the end of the recording. If a recording with the same name already exists, the newer one is given the suffix „-2“, „-3“, etc.

From:

<https://www.nayal.de/> -

Permanent link:

<https://www.nayal.de/doku.php/oz:timereditor>

Last update: **2024/01/14 19:39**