

Inhaltsverzeichnis

Fourth Menu Screen	3
---------------------------	-------	---

Fourth Menu Screen

The *SmartEPGvu⁺* menu can be accessed by pressing the menu key on the remote control when a view is open.



The menu can always be called up when one of the views is displayed.

Meaning of the individual keys actions when using the menu:



Exit
closes the menu window without saving. However, a query is displayed asking whether you really want to exit without saving.



Save
The current setting is saved.




Default values
All settings will be reset to default.



Toggle
Settings that can be determined via a **✓** or **✗** can be selected or deselected with the OK key.



Each menu item can be changed with the right/left keys.

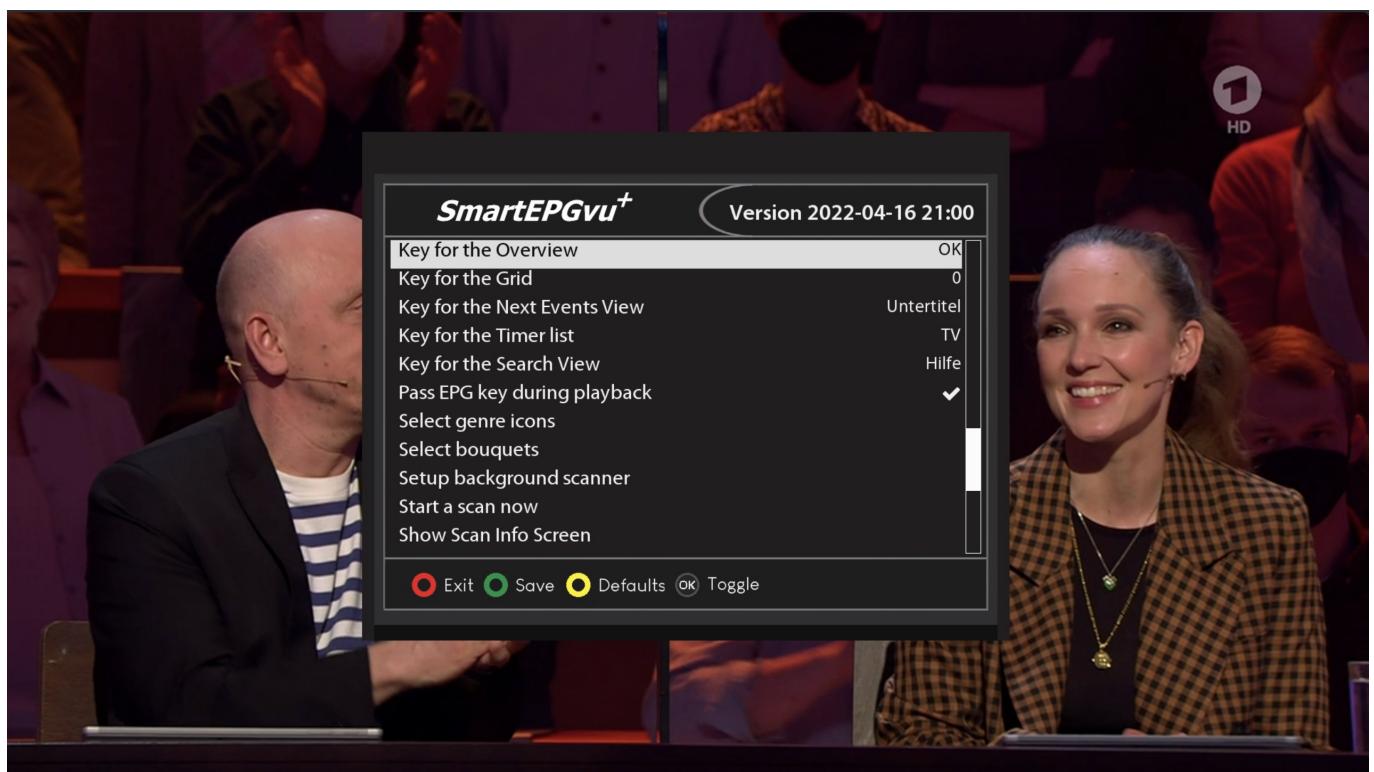

- **Key for the Overview**

Any key can be defined for direct access to the [Overview view](#).

- **Key for the Grid**

Any key can be defined for direct access to the [Grid view](#).

- **Key for the Next Events View**

Any key can be defined for direct access to the [Next event view](#).

- **Key for the Timer list**

Any key can be defined for direct access to the [Timer view](#).

- **Key for the Search View**


Any key can be defined for direct access to the [Search view](#).

- **Pass EPG key during playback**

WActivating this setting makes it possible to show the EPG data of the current recording during playback by pressing the EPG key.

- **Select genre icons**

The genre icons to be displayed can be activated or deactivated.

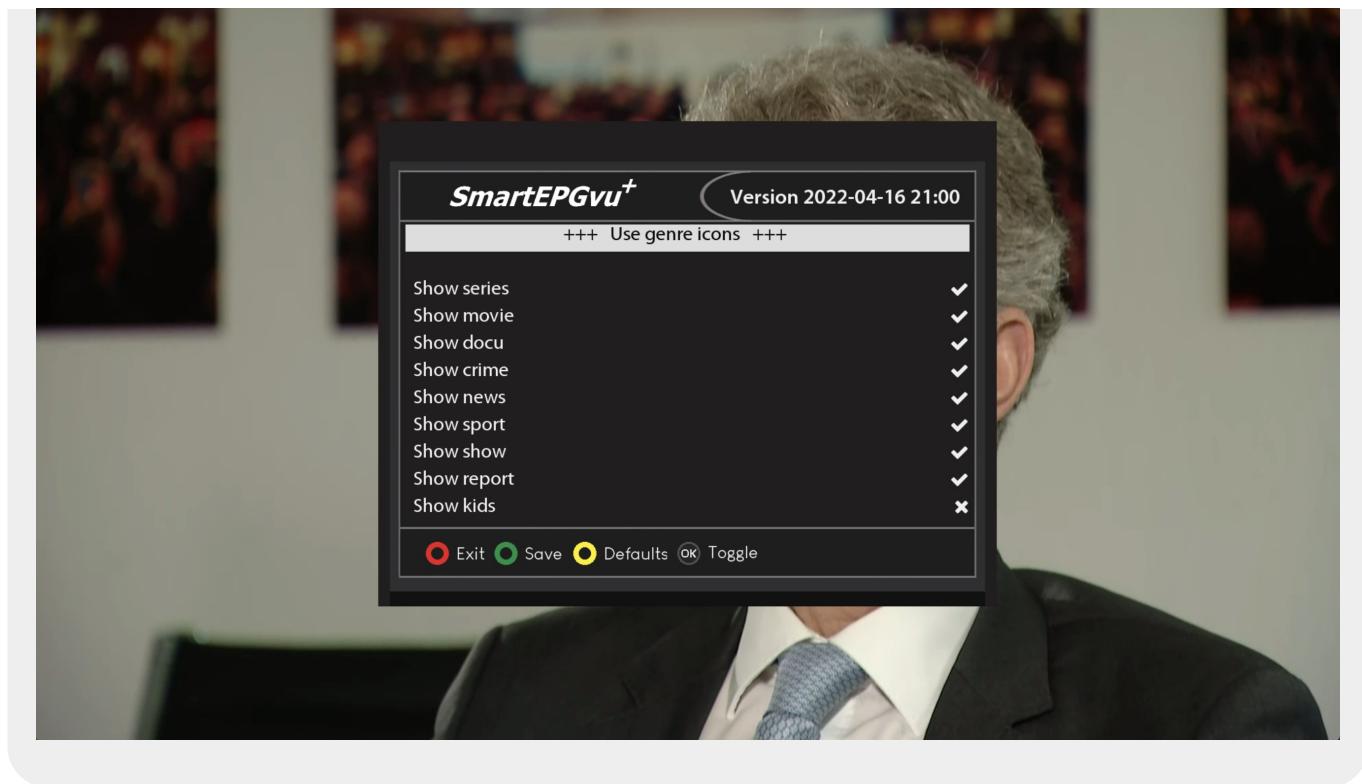

- **Select bouquets**

Here you select the bouquets for which the scan should be carried out.



A selection must be made or no scan will be performed.

- * **Background scan settings**

EPG background scan: With this feature, the EPG of all channels can be updated regularly. It has its own settings menu, which is displayed by clicking on **OK** . Since the scan is performed in streaming mode, the REC icon in the VfD flashes during this time. Unfortunately, SmartEPG has no influence on this.



- Enabled = background scanner can be enabled or disabled.
- Interval = Here the interval of the scan can be specified in hours.
- Start time = What time should the background scan be started.
- End time = What time should the background scan be ended.
- Smart channel selection = If this option is activated, only the channels that have a timer set in the next 24 hours will be scanned.

- **Start a scan now**

This starts a manual scan.

- **Show Scan Info Screen**

This will show a summary of the scan activity including the number of new timers created.

From:
<https://nayal.de/> -

Permanent link:
<https://nayal.de/doku.php/en:menu4>

Last update: **2024/01/14 19:39**



