Inhaltsverzeichnis

Second Menu Screen

The *SmartEPGvu*+ menu can be accessed by pressing the menu key on the remote control when a view is open.

The menu can always be called up when one of the views is displayed.

Meaning of the individual keys actions when using the menu:


Exit
closes the menu window without saving. However, a query is displayed asking whether you really want to exit without saving.

Save
The current setting is saved.

Default values
All settings will be reset to default.

Toggle
Settings that can be determined via a ✔ or ✖ can be selected or deselected with the OK key.

Each menu item can be changed with the right/left keys.

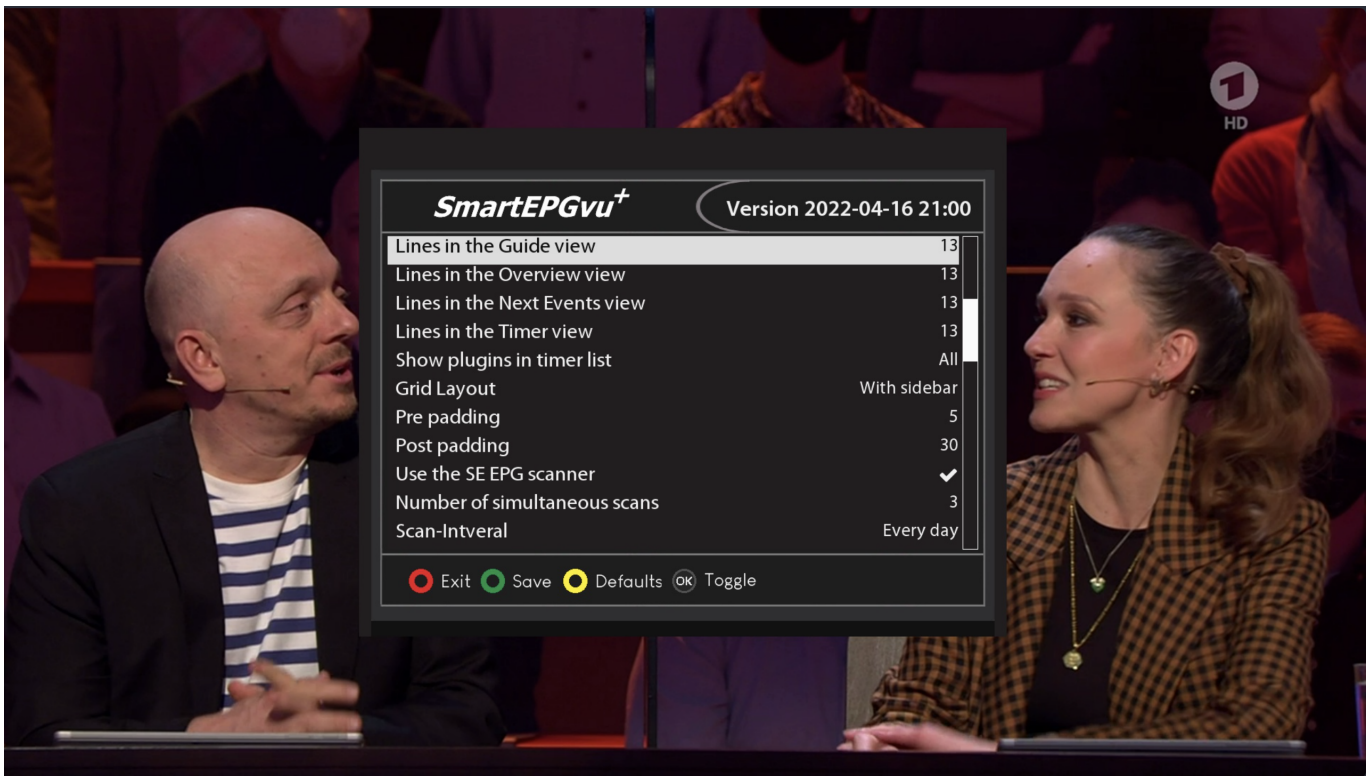

- **Lines in the Guide view**

You can choose either a 13 or 15 line display in the Guide view.

* **Lines in the Overview view**

You can choose either a display of 13 or 15 lines in the Overview view.

- **Lines in the Next Events view**

You can choose either a 13 or 15 line display in the Next event view.

- **Lines in the Timer view**

You can choose either a display of 13 or 15 lines in the Timer view.

- **Show plugins in timer list**

Here you can select whether **All** plugins, **Only SmartEPGvu+** or **No** icons are to be displayed in the Timer view.

- **Grid Layout**

You can select the Grid Display mode, either „With sidebar“, i.e. with a preview of the current program including EPG information, or „Lines only“.

- **Pre padding**

Here you specify how many additional minutes **before** the actual recording should be recorded.

- **Post padding**

Here you specify how many additional minutes **after** the actual recording should be recorded.

- **Use the SE EPG Scanner**

This sets whether the internal *SmartEPGvu*$^{+}$ scan option should be used or not.

The scan module will be activated 2 minutes after starting *SmartEPGvu*$^{+}$.

- **Number of simultaneous scans**

All tuners or a limited number can be selected for the scan. The more tuners available for the scan, the faster the scan will complete.

- **Scan Interval**

This defines whether the scan should be performed daily or at other intervals.

From:
https://nayal.de/ -

Permanent link:
https://nayal.de/doku.php/en:menue2

Last update: **2024/01/14 19:39**